

WACKER


CREATING TOMORROW'S SOLUTIONS

ELASTOSIL®

PRODUCT OVERVIEW

MOLDMAKING: FORM HAS NO LIMITS

ELASTOSIL® M, C and RT High-Quality Silicone Rubber

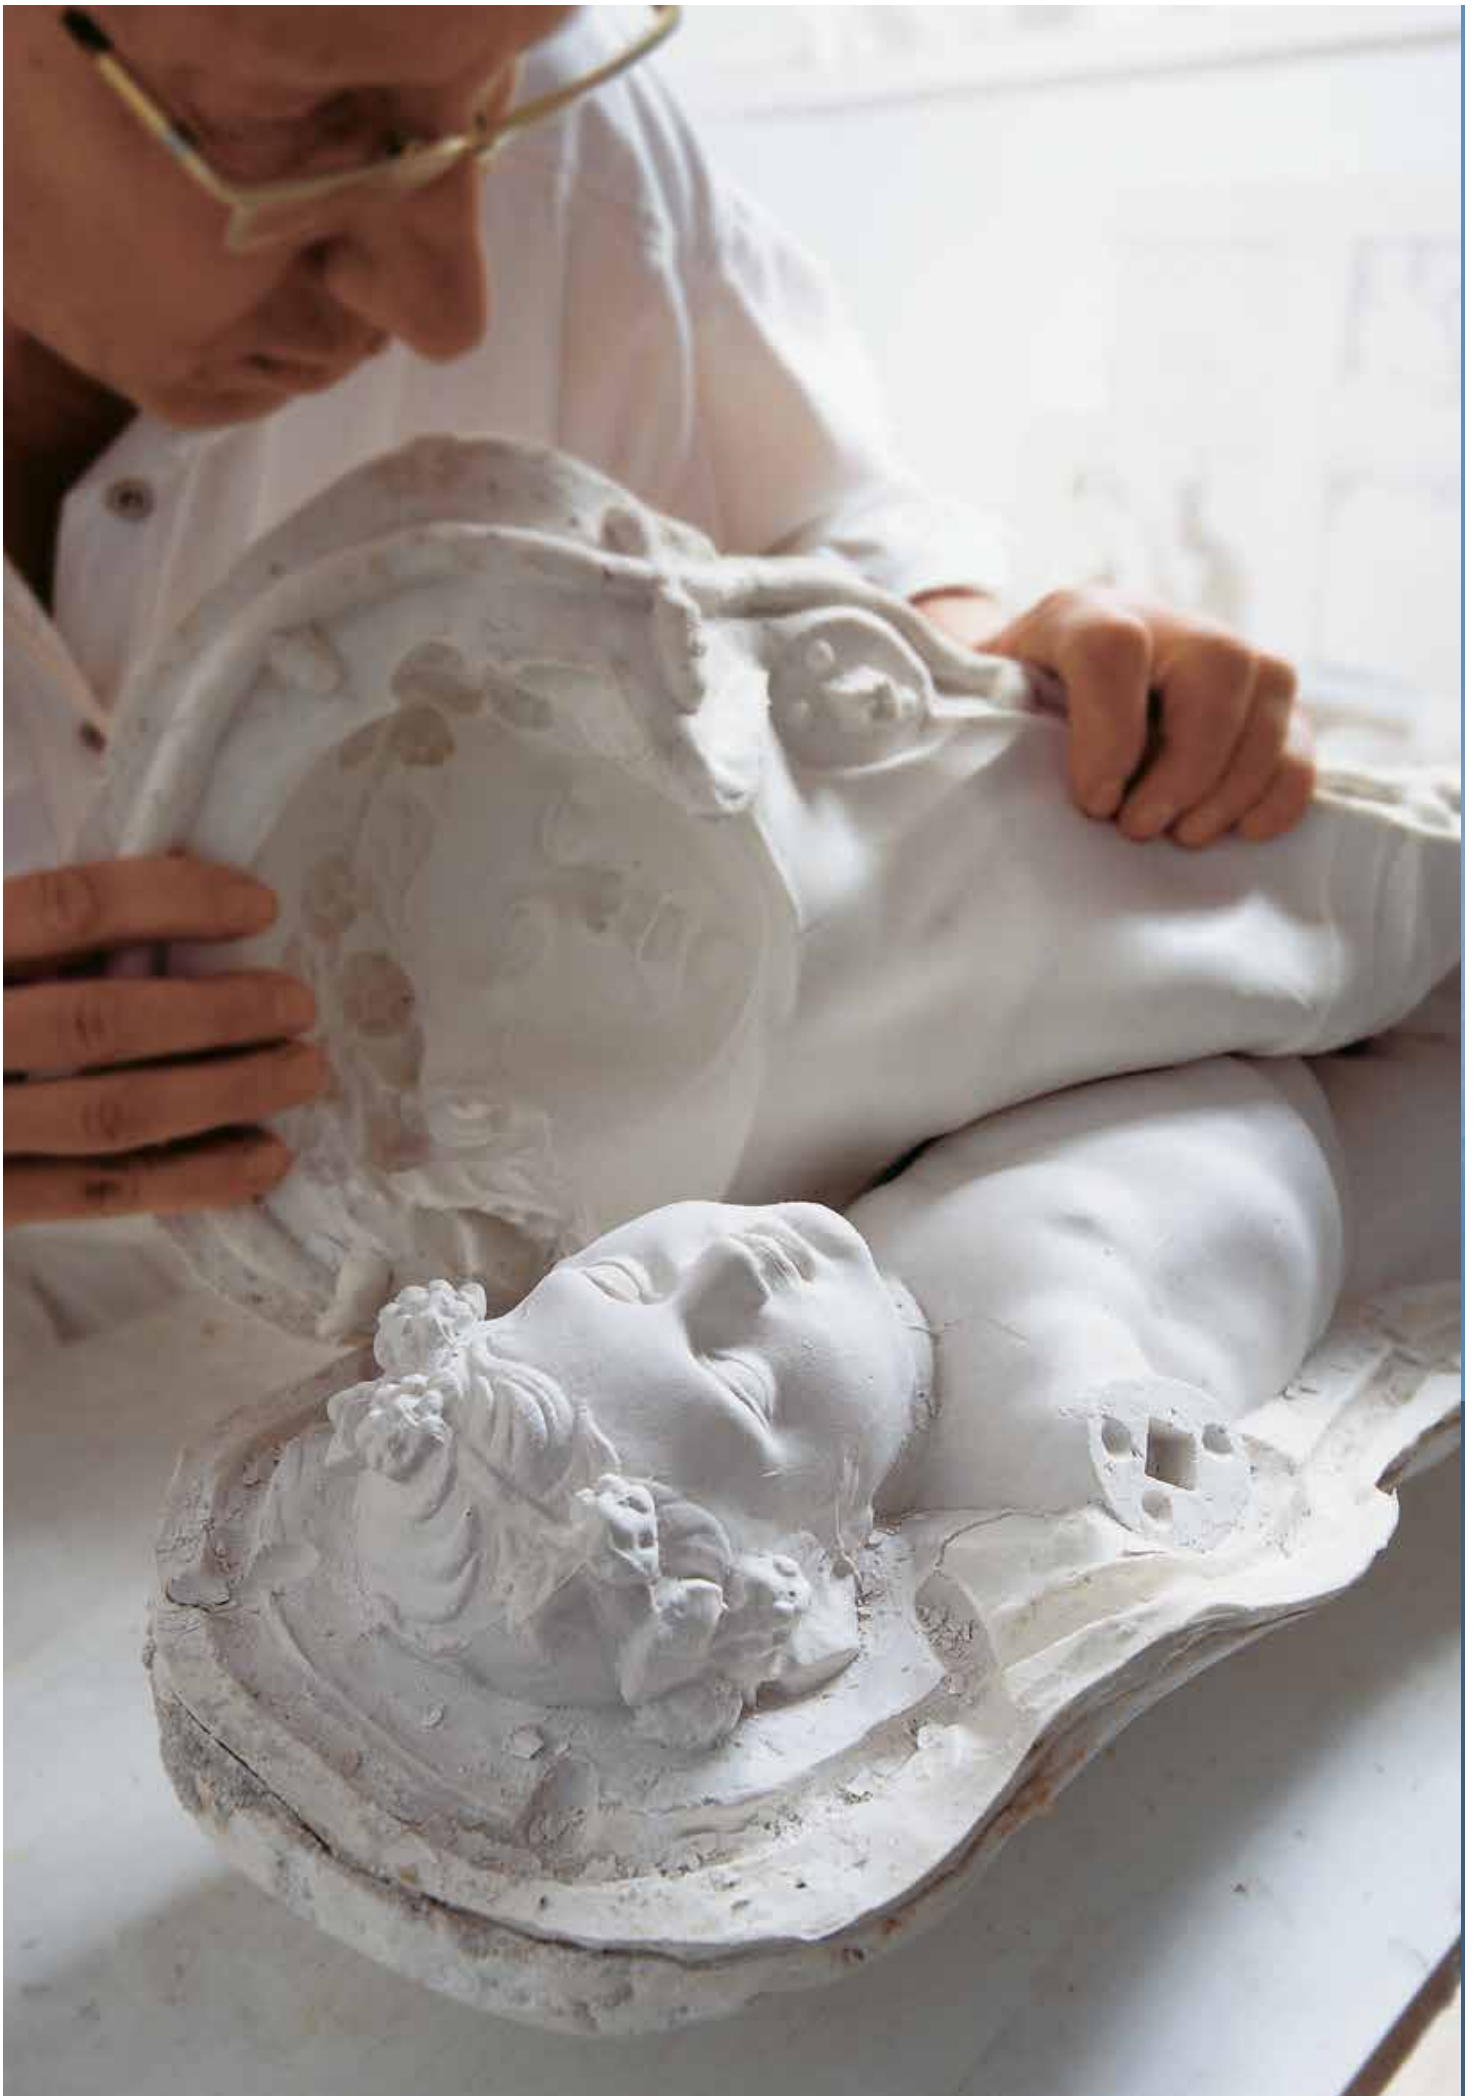

Product	Catalyst	Mixing ratio	Viscosity A [mPa·s]	Viscosity B [mPa·s]	Mixing viscosity [mPa·s]	Hardness [Shore A]	Elongation at break [%]	Tensile strength [N/mm ²]	Tear resistance [N/mm]	Specific gravity (cured) [g/cm ³]	Color (cured)	Pottlife [min]	Vulcanization time [h]	Typical mold/make
2	T 12	3%	15,000		13,000	11	350	2	> 3	1.28	Light gray	75	5	Industrial printing, s
0	Paste T 40	2% / 3% / 5%	Kneadable		Kneadable	45	230	4.5	> 10	1.28	Pink	70 / 60 / 20	4 / 3 / 1	Skin molds
0	T 37 / T 40	3% / 2%	25,000		20,000	23	250	2	> 3	1.30	Yellow	90 / 40	9 - 12 / 5 - 7	Reproduction
0	T 37 / T 40	3% / 2%	25,000		20,000	37	220	2.5	4.5	1.23	White	60 / 50	8 - 10 / 6 - 7	Reproduction
0	T 37 / T 40	3% / 2%	15,000		10,000	60	120	4.5	> 4	1.44	Reddish brown	90 / 40	20 - 24 / 3 - 4	Low-melting metal-4
2	T 21 / T 51	5% / 5%	Non-sag		Non-sag	26	450	4.5	> 23	1.24	White	60 - 90	8 - 10	Skin mold
1	T 21 / T 51	5% / 5%	25,000		20,000	12	600	3.5	> 18	1.22	White	60 - 90	8 - 10	Reproduction, cast
2	T 21 / T 51	5% / 5%	30,000		25,000	20	500	3.5	> 24	1.19	White	60 - 90	8 - 10	Reproduction, cast
4	T 21 / T 51	5% / 5%	35,000		25,000	25	450	4.5	> 25	1.25	White	60 - 90	8 - 10	Reproduction, cast
1	T 21 / T 51	5% / 5%	40,000		35,000	32	400	5	> 30	1.16	White	60 - 90	8 - 10	Reproduction, cast
3	T 35	5%	40,000		35,000	25	350	5	> 20	1.20	White	90	15 - 20	Reproduction
Product	Catalyst in component...	Mixing ratio A : B	Viscosity A [mPa·s]	Viscosity B [mPa·s]	Mixing viscosity [mPa·s]	Hardness [Shore A]	Elongation at break [%]	Tensile strength [N/mm ²]	Tear resistance [N/mm]	Specific gravity (cured) [g/cm ³]	Color (cured)	Pottife [min]	Vulcanization time [h]	Typical mold/make
0	A	9:1	10,000	350	8,000	55	130	3	> 4	1.43	Reddish brown	80	6	Low-melting metal-4
0	B	10:1	20,000	12,000	15,000	20	800	7	> 20	1.10	Translucent	90	12	Reproduction
1	B	9:1	15,000	800	10,000	28	700	6.5	> 30	1.13	Reddish brown	90	12	Reproduction, auto
0	B	10:1	15,000	800	10,000	28	700	6.5	> 30	1.13	White	90	12	Construction
5	B	10:1	20,000	700	15,000	37	480	7	> 30	1.14	White	90	12	Construction
1	A	10:1	50,000	400	30,000	43	> 300	> 4.5	> 25	1.07	Translucent	90	12	Prototype (no oil-bl
2	B	10:1	20,000	700	15,000	37	480	7	> 30	1.14	Dark red	90	12	Reproduction, com
3	B	9:1	40,000	800	25,000	48	300	5	> 10	1.31	Gray	90	12	Reproduction, auto
4	A	10:1	70,000	500	50,000	40	400	5.5	> 25	1.07	Translucent	80	12	Reproduction, slight oil
5	A	10:1	50,000	3,500	35,000	40	330	5	> 28	1.06	Translucent	80	12	Prototype (strong c
0	A	10:1	120,000	7,000	80,000	55	250	5.5	> 12	1.28	Beige	90	12	Reproduction, prot
0	B	10:1	7,000	1,200	6,000	17	900	5	> 12	1.05	Translucent	35	4	Pad printing
3	B	9:1	15,000	800	10,000	31	700	7.5	> 30	1.12	Reddish brown	30	5	Pad printing
9	B	10:1	14,000	900	8,000	31	500	6	25	1.13	Turquoise	40	3	Pad printing, artist
0	A	1:1	25,000	25,000	25,000	25	500	5	25	1.05	Blue - transl.	20	1	Vacuum-bag comp
5	A	1:1	2,500	2,500	2,500	17	400	3	5	1.05	Translucent	12	1	Reproduction
9	A	1:1	3,000	4,000	3,500	20	> 400	3.5		1.05	Translucent	7	0.5	Reproduction
5 F	A	1:1	6,000	6,000	6,000	28	500	5	25	1.05	White	15	2	Printing rollers, rep
15	CAT Vario / Vario F	10:1	5,000		3,000	15...*	900	6.5	15	1.06	Translucent	150 / 2	6 / 0.25	Reproduction
40	CAT Vario / Vario F	10:1	15,000		10,000	... 40**	450	8	15	1.15	Translucent	150 / 2	6 / 0.25	Reproduction
fill box	Silicone rubbers for special effects and prosthetics molding (from gel-like to medium hardness: FX Gel 30, FX 10, FX 20, FX 28) and 4 additives (FX Softener, FX Fast cure, FX Thixo), more info at www.wacker.com/elastosil-fx													
* and should not be used in preparing specifications.														
DSL®VARIO 40														
DSL®VARIO 15														

PROPERTY TO PRODUCT

Brand	Product	Processing					Casting Materials Suitability				Special Properties				
		Easy mixing (1:1)	Low viscosity	Non-sag	Fast vulcanization	Long potlife	Food*	Resin stability				Heat resistant	Anti-static	Pad printing	Oil bleeding
								Epoxy	Poly-ester	Polyurethane	Concrete				
Condensation Curing															
ELASTOSIL®	RT 402				●								●		
ELASTOSIL®	M 1470			●	●										
ELASTOSIL®	M 4400					●									
ELASTOSIL®	M 4440					●									
ELASTOSIL®	M 4470		●			●	●	●	●		●				
ELASTOSIL®	M 3502			●		●									
ELASTOSIL®	M 4511					●		●	●						
ELASTOSIL®	M 4512					●		●	●						
ELASTOSIL®	M 4514					●		●	●						
ELASTOSIL®	M 4541					●		●	●						
ELASTOSIL®	M 4503					●									
Addition Curing: Shrinkage < 0.1%															
ELASTOSIL®	M 4370		●				●	●	●	●		●			
ELASTOSIL®	M 4600					●	●								
ELASTOSIL®	M 4601					●	●	●	●	●					
ELASTOSIL®	M 4630		●			●	●	●	●	●	●				
ELASTOSIL®	M 4635					●	●	●	●	●	●				
ELASTOSIL®	M 4641					●	●			●					
ELASTOSIL®	M 4642					●		●	●	●					
ELASTOSIL®	M 4643					●		●	●	●					
ELASTOSIL®	M 4644					●				●					●
ELASTOSIL®	M 4645					●				●					●●
ELASTOSIL®	M 4670						●	●	●	●					
ELASTOSIL®	RT 620		●		●		●							●	
ELASTOSIL®	RT 623		●		●									●	
ELASTOSIL®	RT 629		●		●							●		●	
ELASTOSIL®	C 1200	●			●			○	●						
ELASTOSIL®	M 4115	●	●												
ELASTOSIL®	M 4119	●	●		●										
ELASTOSIL®	M 4125 F	●	●		●		●								
ELASTOSIL®	VARIO 15		●		●		●								
ELASTOSIL®	VARIO 40				●		●								

* FDA conformity
 ○ For prepreg use
 ●● Strong oil bleeding



WACKER

Wacker Chemie AG
Hanns-Seidel-Platz 4
81737 Munich, Germany
www.wacker.com/contact

www.wacker.com

Follow us on:



7892e/07.21 replaces 7461F 03.20

The data presented in this medium are in accordance with the present state of our knowledge but do not absolve the user from carefully checking all supplies immediately on receipt. We reserve the right to alter product constants within the scope of technical progress or new developments. The recommendations made in this medium should be checked by preliminary trials because of conditions during processing over which we have no control, especially where other companies' raw materials are also being used. The information provided by us does not absolve the user from the obligation of investigating the possibility of infringement of third parties' rights and, if necessary, clarifying the position. Recommendations for use do not constitute a warranty, either express or implied, of the fitness or suitability of the product for a particular purpose.